

**RPM-3-TM1 | RPM-3-TM2**  
**RPM-3-TM3 | RPM-5-TM1**  
**RPM-5-TM2 | RPM-5-TM3**

Prepared by:

American Lubrication Equipment Corporation

## Adjusting the Reel Arm

Because the Reel arm comes pre-installed with the position of the arm opposite of the plate, you will need to re-position the location of the arm

- Pull the hose a few feet to create a lockout
- Take and remove the four bolts in the arm in the image
- Rotate the position of the arm

Place all four bolts back in and tighten up with wrench



## Tank Position

When setting up the tank make sure the drain port is facing toward you to represent the "Front" of the tank.

This will allow you to position the mounting plate correctly during installation





## Assembly

Place the 6" Center mount with open hole on opening



Place mounting plate on top and adjust railing for fitment

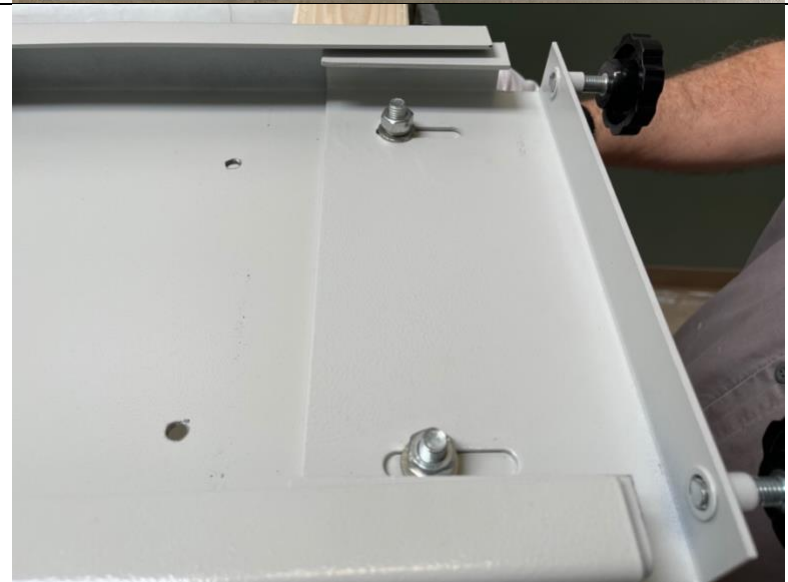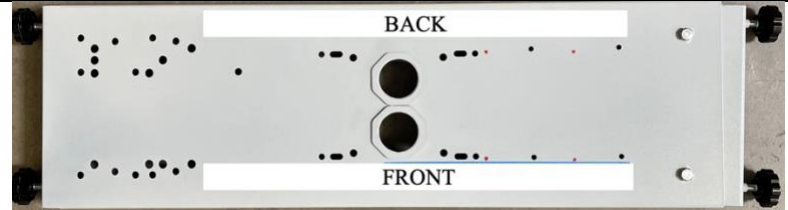


Insert the foam in the underside of the mounting plate



Slide the reel on the bracket, use the hardware to secure the reel to the bracket



Make sure your reel is facing the front of the tank

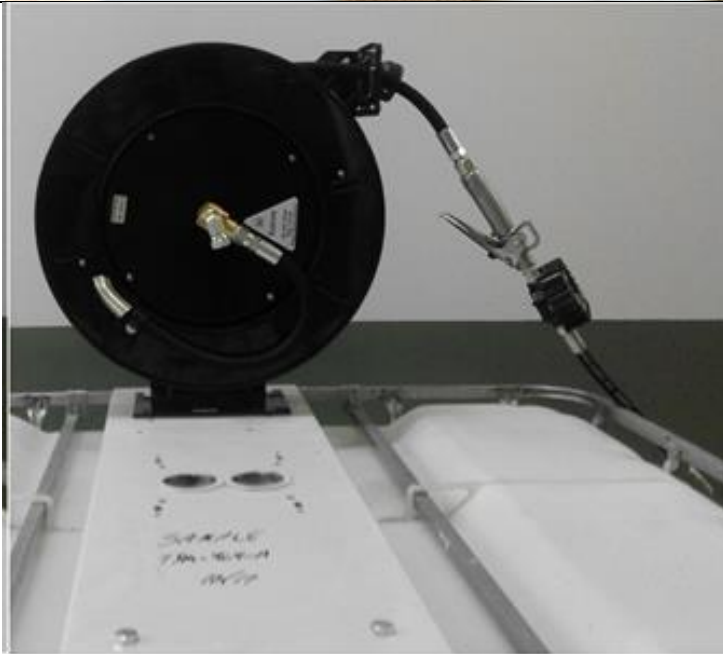


Apply Teflon and Gasoila to the connections

- Pull and place the following parts in this order
  - Fill Cap
  - Bell Reducer
  - 1.5 close nipple
  - Double tap bushing
  - 1.5x3" nipple



Install on the front side of the plate

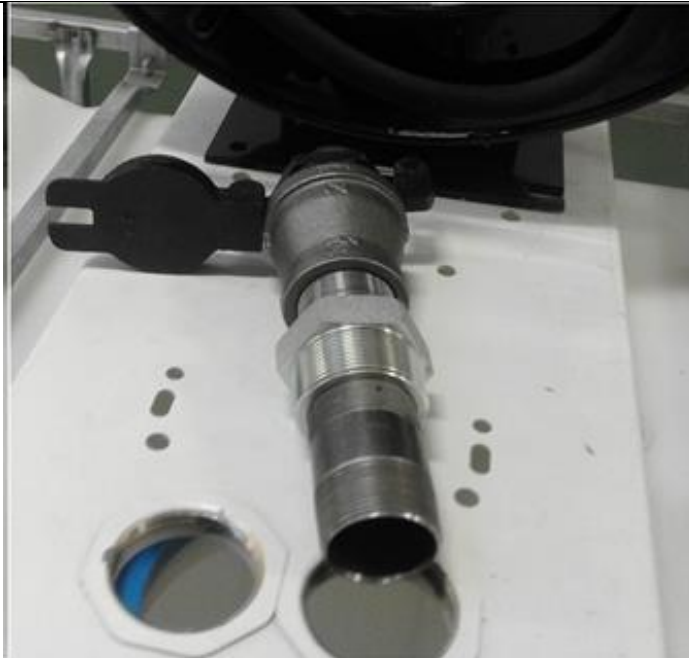


Apply Teflon and Gasoila to the connections


Attach the downtube to the bottom of the pump



Slide the pump behind the fill connection,

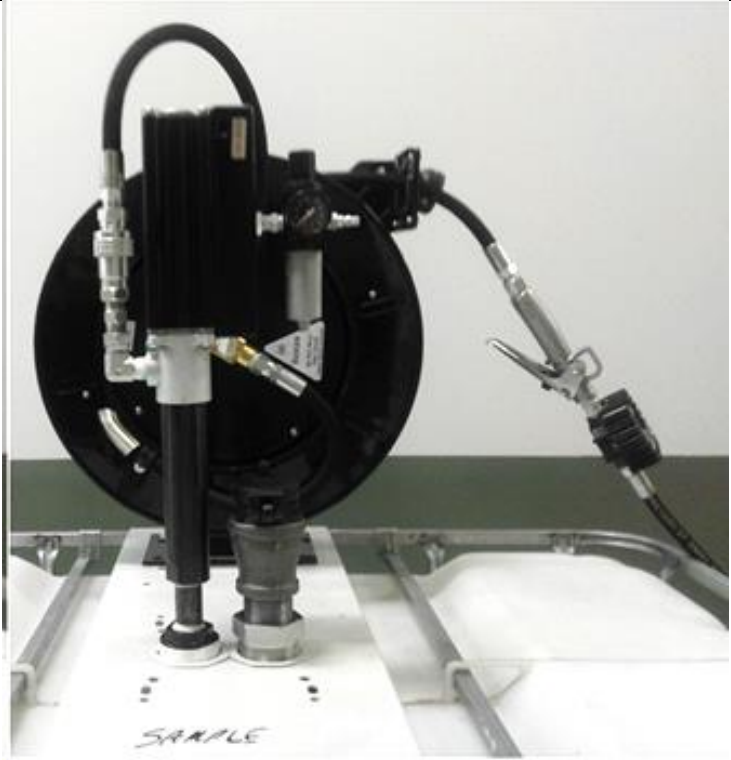

Apply Teflon and Gasoila to the 90-degree connection, straight connector, and quick connection, once tightened make sure to face the connection upward

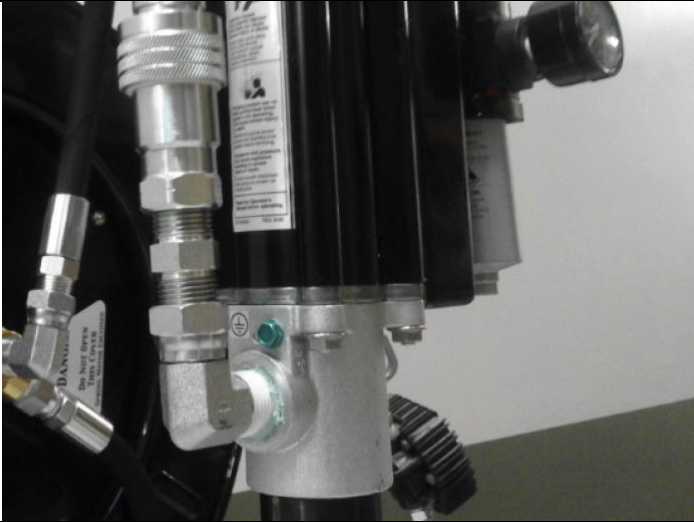


On the side of the reel, Apply Teflon and Gasoila to the 90-degree connection and when tighten make sure the connection is upward



With the connection hose Apply Teflon and Gasoila to the quick connect (TIM-179) and attach the connector to the 2 feet oil connection hose.



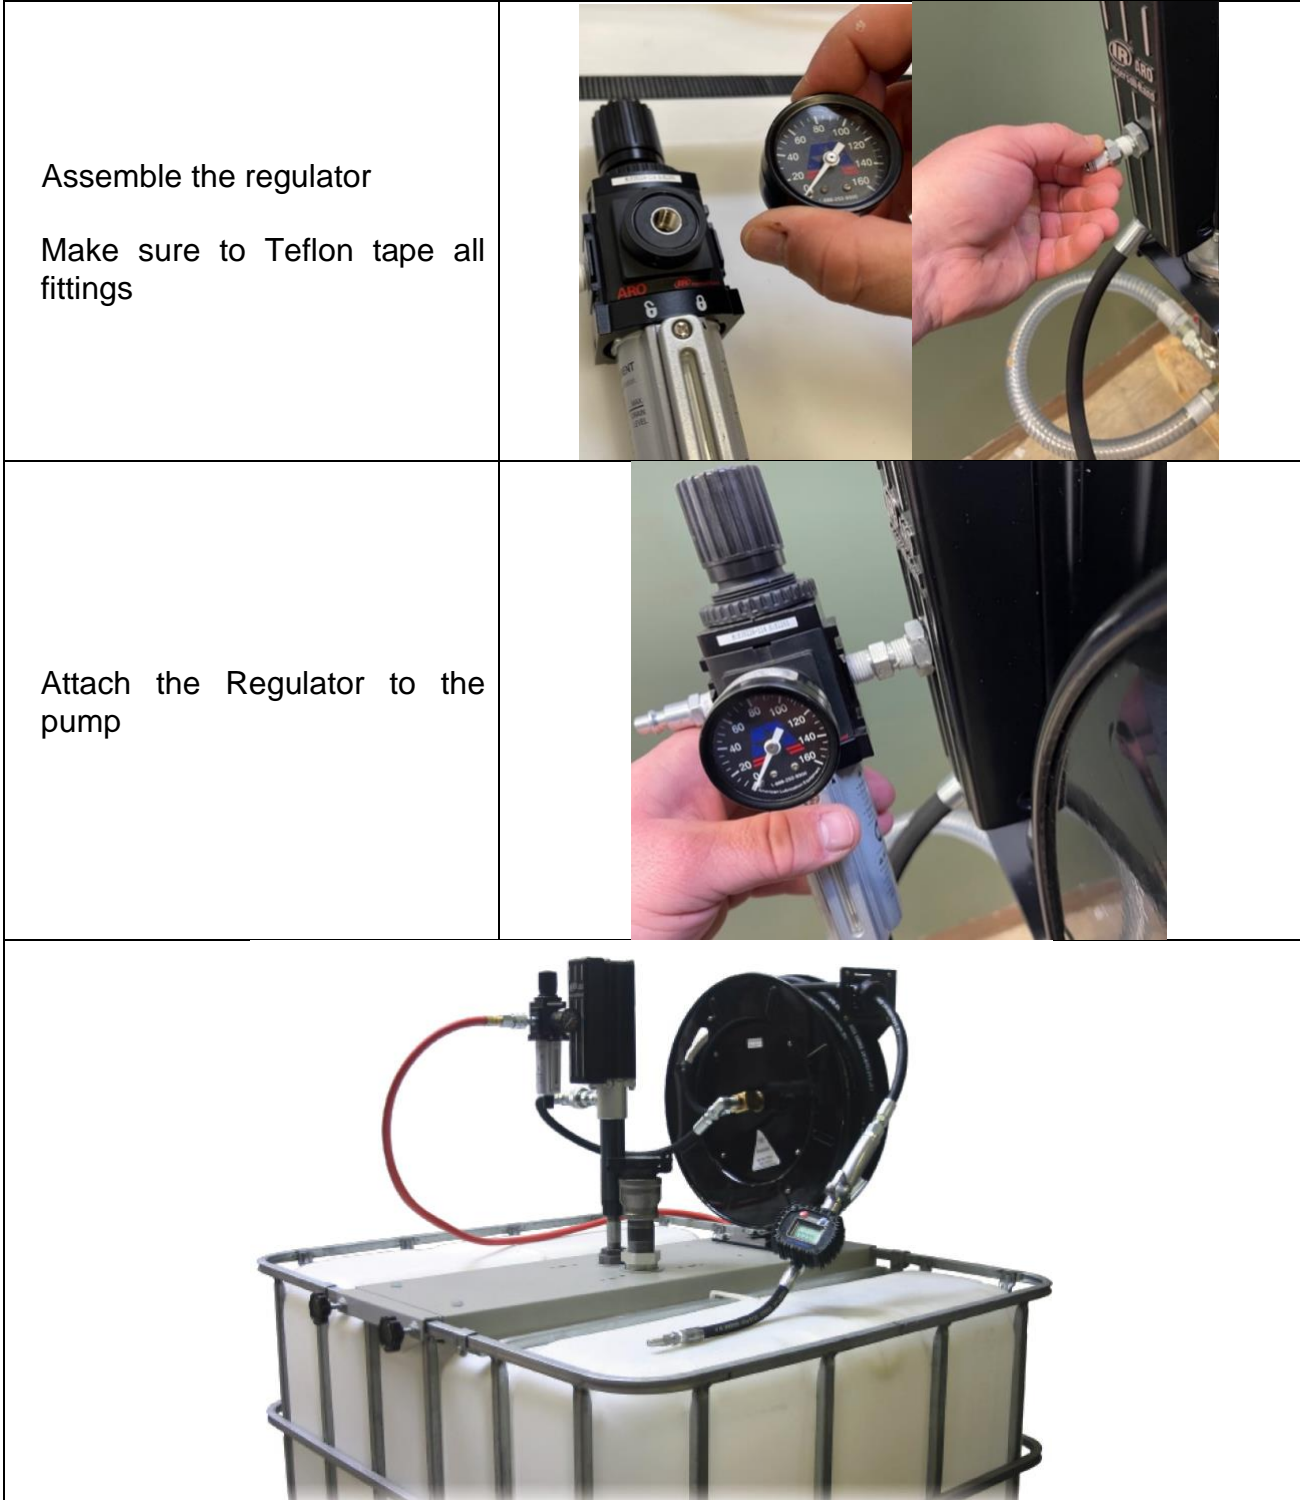

If you have any question or concerns, please contact us at [Customerservice@americanlube.com](mailto:Customerservice@americanlube.com)