

# M series Four-Way Reversing Valves

SPECIFICATION SHEET

The M series is a directional flow control valve commonly used to simplify the filling and emptying of used oil containers on lube trucks or for transferring fluids from bulk supply to other tanks.


## Features

- Unrestricted flow
- 200 PSI maximum working pressure
- Simplifies installations by eliminating the need for multiple valves
- Two positions—"fill tank" or "empty tank"—for easy operation
- Four threaded ( $5/16"$ ) mounting holes for flush mount installation



## Construction Details

- Body and spool are anodized aluminum
- O-Ring is Viton®
- Hardware is stainless steel

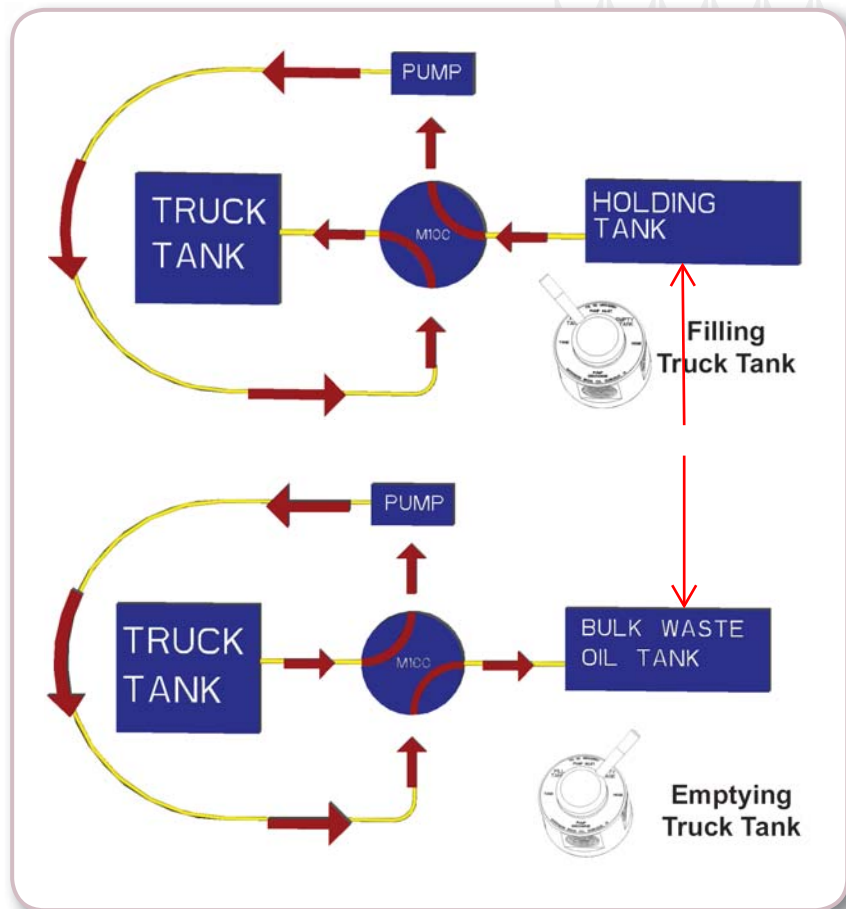

I.D. Number	A	B	C	Height	Width	Weight
M075--0100 AVAS	3/4"	90°	200	3.9"	4.33"	4.0 lbs
M100--0100 AVAS	1"	90°	200	3.9"	4.33"	4.0 lbs
M11500100 AVAS	1 1/2"	90°	200	3.9"	4.33"	4.0 lbs
M200--0100 AVAS	2"	90°	200	4.4"	4.72"	4.0 lbs

### SPECIFICATION OPTIONS:

- A**—Size
- B**—Handle throw
- C**—Maximum pressure (PSI)
- Height**—Dimension from base to top
- Width**—Dimension across valve
- Weight**—Shipping weight

570 E. 7th Street, P.O. Box 238 | Dubuque, IA 52004-0238  
t. 563.583.5701 | 800.553.4840 | f. 563.583.5028

www.morbros.com