


# TIM-651 PRO SERIES MECHANICAL CONTROL HANDLE PARTS BREAKDOWN CHART



| Model Number | Tip Style | Description          | Tip Assembly |
|--------------|-----------|----------------------|--------------|
| TIM-651-FA   | 3*        | Flex Automatic       | TIM-747      |
| TIM-651-FM   | 1         | Flex Manual          | TIM-743      |
| TIM-651-FMHF | 6         | Flex Manual Hi-Flow  | TIM-743-1    |
| TIM-651-RA   | 4*        | Rigid Automatic      | TIM-746      |
| TIM-651-RM   | 2*        | Rigid Manual         | TIM-753      |
| TIM-651-RMHF | 5*        | Rigid Manual Hi-Flow | TIM-752      |

\* These tip assemblies have had their compression nuts "Loctited" at the factory during the assembly process. We recommend placing a few drops of Loctite® 680 Retaining Compound on the threads of the compression nut when replacing these tip assemblies. This will assure that the compression nuts do not come loose during normal use. Do not, under any circumstances, place Loctite® on the threads that are used to fasten the tip assembly to the handle.

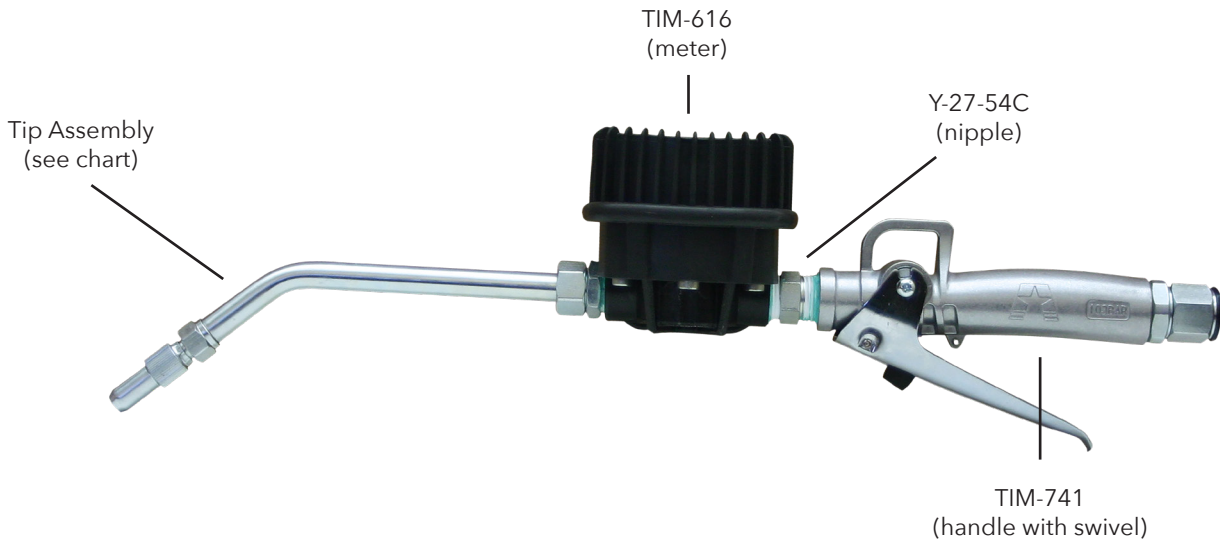

11212A McCormick Drive  
Hunt Valley, MD 21031

TIM-651-INST



1251 North Pratt Street  
Anaheim, CA 92801

Date: Apr 2021  
Version: 1.01